


# GUARD1

## GUARD1 Wristband | Printing and Assembly Instructions

### Printing the Wristband

#### STEP 1

Select the transparency setting or other high heat setting for your laser printer.

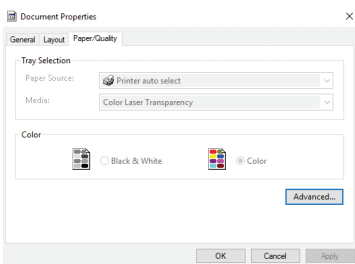

#### STEP 2

Put the wristband and its carrier in the envelope slot of your laser printer. It doesn't matter which side of the wristband is facing up or down.




#### STEP 3

Print the wristband. See your printing software manual for instructions.



#### STEP 4


Fold the carrier at the perforations and remove the wristband from the carrier.

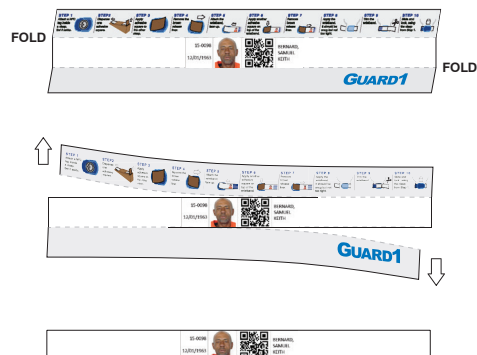

## Applying the Wristband


### STEP 1

Remove the RFID / NFC tag from the release liner and position it in one piece of the clasp. Set aside this upper clasp piece (Step 10).

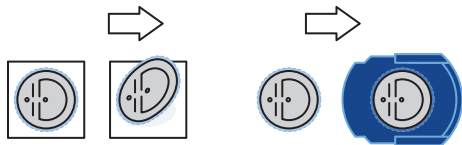


### STEP 2

Pull the white adhesive backing tape to dispense one adhesive square from the adhesive dispensing box. Remove the square by picking it up from the sides— **DO NOT touch adhesive.**

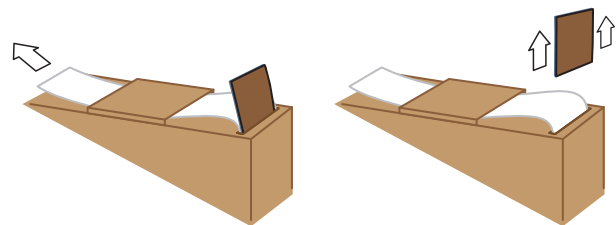


### STEP 3

Apply the exposed adhesive to the clasp.

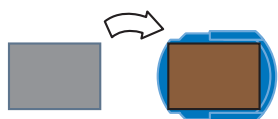


### STEP 4

Remove the brown release liner.

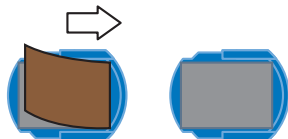

### STEP 5

Apply the wristband.

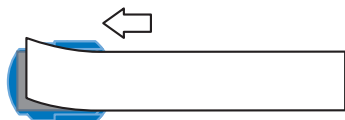

### STEP 6

Remove a second adhesive square (see Step 1) and apply the exposed adhesive to the wristband.




### STEP 7

Remove the remaining brown release liner.




### STEP 8

Apply the wristband. It should be snug but not too tight.

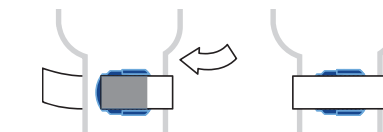

### STEP 9

Cut off the excess wristband material.

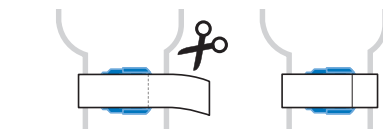

### STEP 10

Slide and lock the upper clasp by hand OR using the clasp tool.

